


DIFFUSED BATTEN



DIFFUSED BATTEN

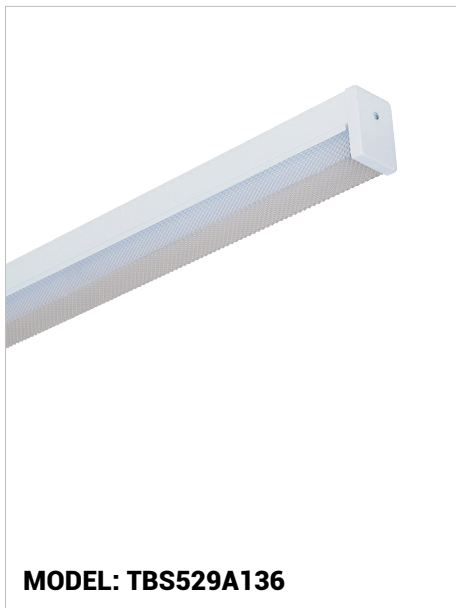

Introduction

Diffused batten is the surface ceiling lamp tray for indoor use. The manufacture process is extremely strict, high quality output with CE, ROHS certified.

Feature

- Diffused batten is the most brackets with prismatic diffuser for indirect lighting. The luminaire can be suspended or directed ceiling mounted. This series is designed for T8 fluorescent lamps/LED tube so that it is suitable for many purpose uses.
- Housing is made of 0.5/0.7mm high quality steel sheet which is painted with undergo rust removal, grease removal, rustproof treatment and full spray-coated treatment in white, no rust will appear in normal indoor using for 5 years.
- Housing has a new rectangular design which is suitable for various types of architectures. Steel sheet end caps, PS prismatic diffuser.
- This series is designed for fuorescent lamps/LED tube so that it is suitable for many purpose uses.
- Power cable standard 1m.

Application area

- Applied to offices, stores, shopping malls, discount stores, supermarkets, factory, etc.

Mounting type


- Surface mounting.

Approval and marking



IP40


Dimension (mm):

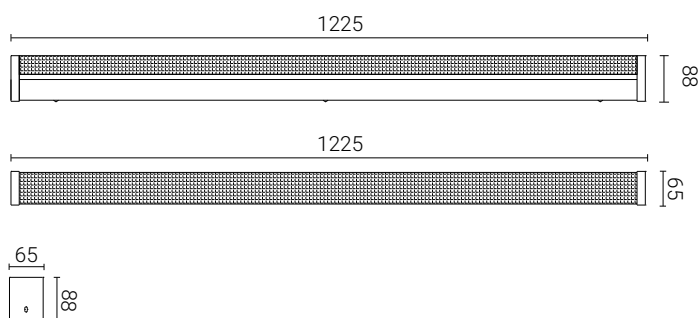

Product color




White


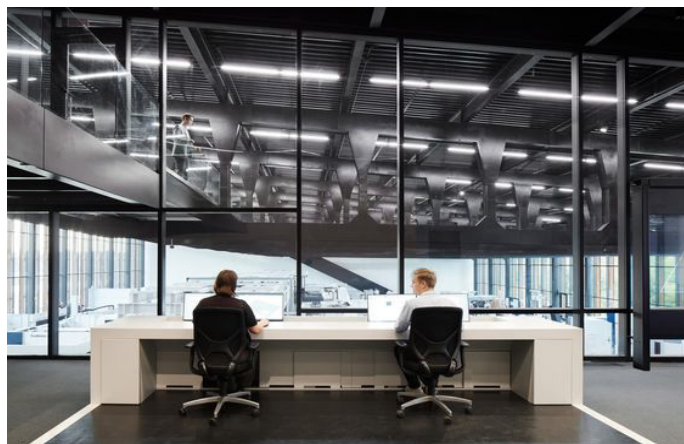


DIFFUSED BATTEN


Variant

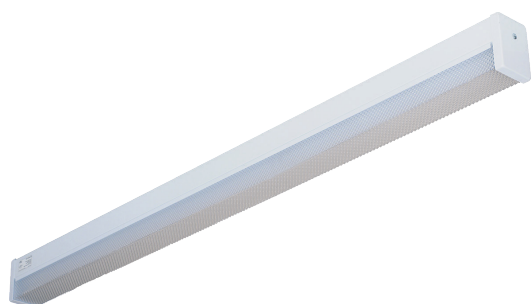

TBS529A136

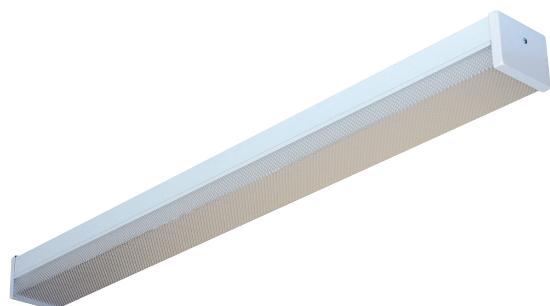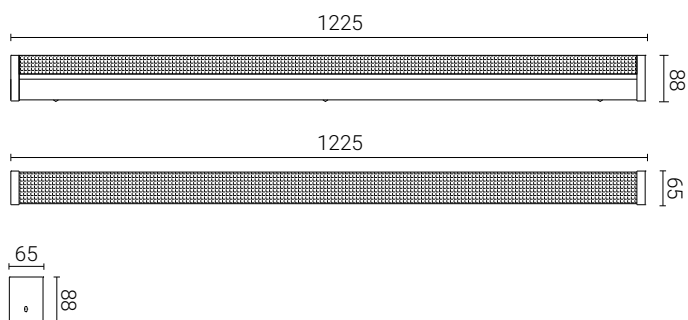

TBS529A236

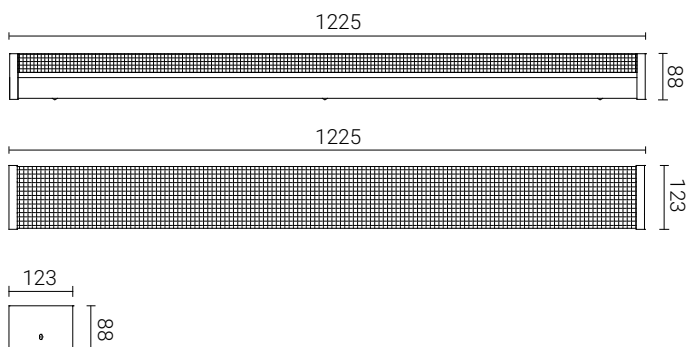

Specification

Model	TBS529A136	TBS529A236
Number of lamp and rated power	1x20W (not include tube lamp)	2x20W (not include tube lamp)
Input voltage	dependent on tube lamp	dependent on tube lamp
Others lighting specifications	dependent on tube lamp	dependent on tube lamp
Diffuser	Polystyrene (PS) prismatic	Polystyrene (PS) prismatic
Protection grade	IP40	IP40
Product life	>50000 hours	>50000 hours

