

## DIFFUSED FITTINGS



## DIFFUSED FITTINGS



**MODEL: TRD048236**

### Introduction

Diffused fitting is the surface ceiling lamp tray for indoor use. The manufacture process is extremely strict, high quality output with CE, ROHS certified.

### Feature

- Housing material is made of >0.6mm high quality strength steel sheet which is painted with undergo rust removal, grease removal, rustproof treatment and full spray-coated treatment in white.
- Reflector is made of Ivory-white board (I), rhombic acrylic board (R) for functional uses with high lighting output, dust proof, damp proof, easy cleaning no change color for long time illumination.

### Application area

- Applied to laboratories, hospitals, medical centres, etc.

### Mounting type


- Surface ceiling.

### Approval and marking



IP40

### Dimension (mm):

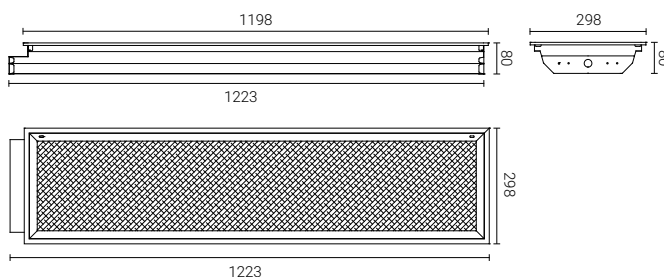

### Product color



White (WH)




# DIFFUSED FITTINGS


## Variant




TRH054236

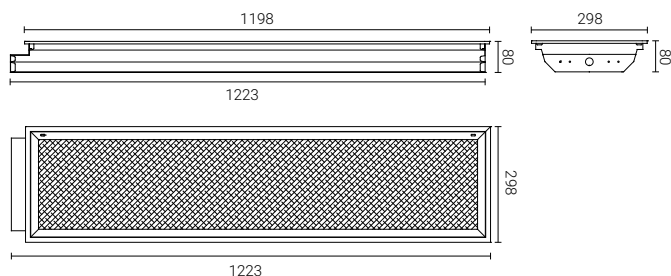


TRH054336

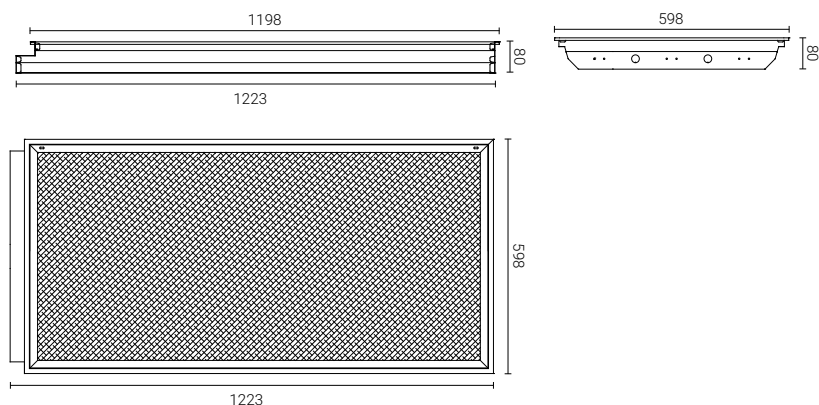

TRH054318

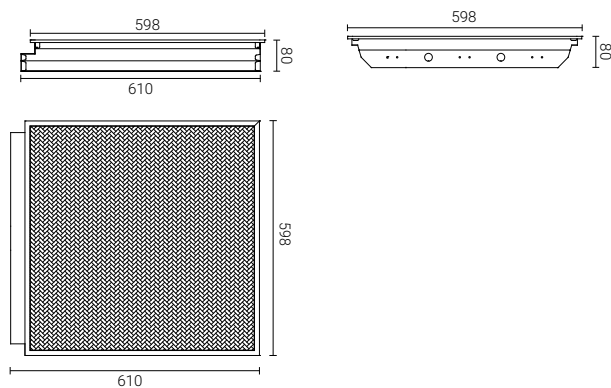

TRH054418

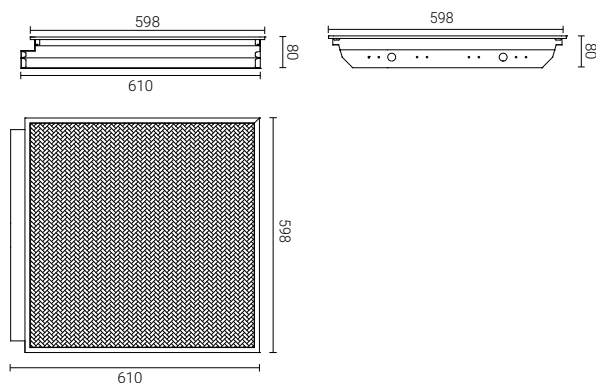

We reserve the right to make technical and design changes.

Date: 16/01/2023

THIEN MINH MECHANICAL - ELECTRIC JSC

Head office: MESTAR Building, No. 98/11 Ung Van Khiem Street, Ward 25, Binh Thanh District, Ho Chi Minh City, Vietnam.

Tel: (84) 28.3899 4790 - Email: mestar@mestar.vn - Web: www.mestar.vn



## DIFFUSED FITTINGS

### Specification

Model	TRD048236	TRD048336	TRD048318	TRD048418
Number of lamp and rated power	2x20W (not include tube lamp)	3x20W (not include tube lamp)	3x10W (not include tube lamp)	4x10W (not include tube lamp)
Input voltage	dependent on tube lamp	dependent on tube lamp	dependent on tube lamp	dependent on tube lamp
Others lighting specifications	dependent on tube lamp	dependent on tube lamp	dependent on tube lamp	dependent on tube lamp
Cover	rhombic acrylic board (R)	rhombic acrylic board (R)	rhombic acrylic board (R)	rhombic acrylic board (R)
Protection grade	IP40	IP40	IP40	IP40
Product life	>50000 hours	>50000 hours	>50000 hours	>50000 hours

