INSTALLATION INSTRUCTIONS

LED LUXSPACE DOWNLIGHT

MODEL: MI1S179-25W

I. Important Safety Instructions:

Basic safety precautions should always be followed when installing, including the following:

1. Read all instructions.
2. Licensed electrician for installation only.
3. Always ensure the power is OFF and the fitting has cooled down before performing any maintenance cleaning, changing the globe or adjustment to the fitting.
4. Do not install any luminaire near the heat source.
5. Do not exceed the nominal supply voltage or amperage ratings.
6. To avoid injury or damage to the fitting, please ensure that power leads and screws are secure

II. Installation Instruction

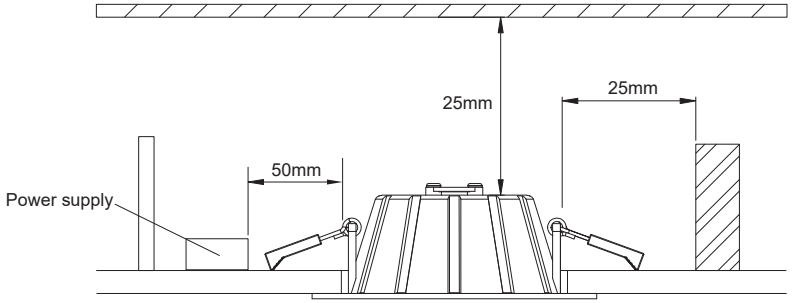

Fig 1: Installation Spacing

Note: Before installation, please check the IP label on the luminaire to choose the right place to install.

IP20/IP40 : Indoor use only, do not use in wet or damp place.
IP44/IP54 : Suitable for indoor areas including bathrooms and covered/sheltered areas such as porches.
IP65 : Suitable for outdoor areas, not suitable for water immersion.

Note: Before installation, please check the information of driver as below.

Non-dim : Can not be used with any dimmer.
Triac dim : Compliable with recommended TRIAC dimmers, dimming range 8-100%.
0/1-10V : Only work with 0/1-10V dimming system, dimming range 8-100%.
DALI : Only work with DALI dimming system, dimming range 8-100%.

III. Installation Procedure

Downlight with external driver:

For the product with Slide Switch of Color Selection
please select the light color CW/NW/WW before installation.



MESTAR



1 Open a hole according to the cutout size of led downlight.



2 Use screw to open the driver terminal cover, feed the main AC wire L. N. in terminal block respectively, then fix the cover back.



3 Connect the downlight with driver, hold back the spring clip then push the downlight into the hole.

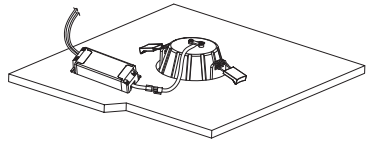

4 Make sure the downlight fixed tightly in ceiling

Downlight with internal driver:

For the product with Slide Switch of Color Selection, please select the light color CW/NW/WW before installation.

Light color changeable button





1 Open a hole according to the cutout size of led downlight.



2 Use screw to open the Luminaire cover on the back, feed the main AC wire L. N. in terminal block respectively, then fix the cover back.



3 Hold back the springclip then push the downlight into the hole.

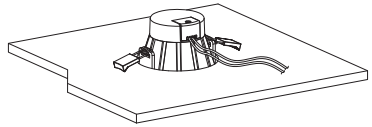

4 Make sure the downlight fixed tightly in ceiling

* Warning: Production modification and improper installation are not valid for warranty.