



## POWER LED MOUNTING & RECESSED WALL LIGHT



# POWER LED MOUNTING & RECESSED WALL LIGHT



**MODEL: MS1CG0734-7x0.5W**

## Introduction

Power LED mounting & recessed wall light is the recessed mounting luminaire for indoor/outdoor use. The manufacture process is extremely strict, high quality output with CE, ROHS certified. Its excellent light brings comfort and good experience to the users.

## Feature

- Front cover hard chromeplated Stainless steel 316#.
- Housing 12# anti-corrosion powder coated aluminum, T=60-80µm. Adhesion of ISO class 1/ASTM class 4B.
- Light window UVstop & fireproof PC.
- Gasket molding shaped silicone seal.
- Power cable outside of luminaire H05RN-F 2x1.0mm², L=0.5m (DC24V), H05RN-F 3x1.0mm², L=0.5m (AC120/240V).
- Cable gland IP67 PG-9 PA66.
- LED driver constant voltage input, constant current output.
- Mounting sleeve PC/ABS alloys.
- Warranty 3 years.

## Application area

- Applied to stairs, way, facade of building, hotel, resort and etc.

## Mounting type

- Recessed mounting.

## Approval and marking



## Feature



## Color temperature



### Single

2700K 3000K 4000K 5700K 6500K

## Product color



## Dimension (mm):

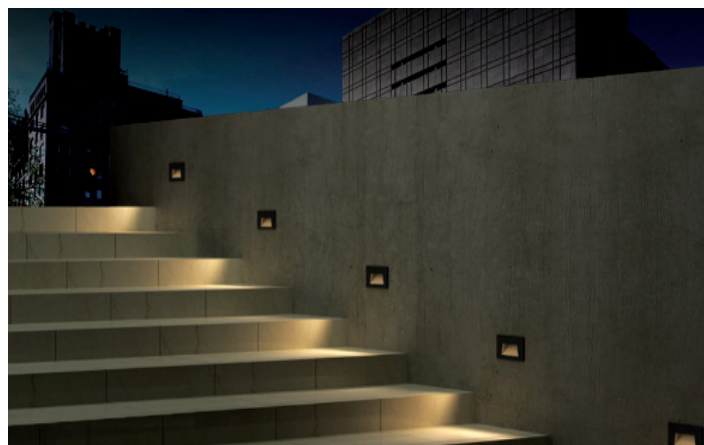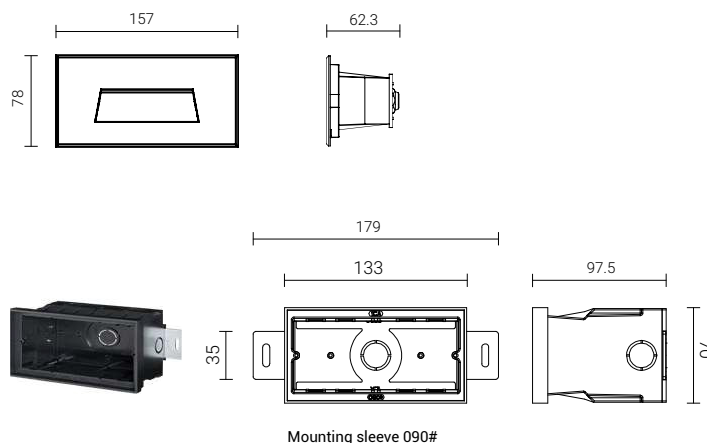


# POWER LED MOUNTING & RECESSED WALL LIGHT

## Specification

Model	MS1CG0734-7x0.5W
Led brand	LED SMD NICHIA
Rated power	7x0.5W
Luminous flux	145lm (cool white), 137lm (warm white)
Luminous efficacy	41.43lm/W (cool white), 39.14lm/W (cool white)
Input voltage	DC24V/AC120/240V 50/60Hz
Color temperature	2700K/3000K/4000K/5700K/6500K
Beam angle	Asymmetric
Control method	On/off, Triac, PWM, 1-10V, Dali
Protection grade	IP65
IK rating	IK10
Operating temperature	-20°C~40°C
Product life	35000 hours

## Typical order example

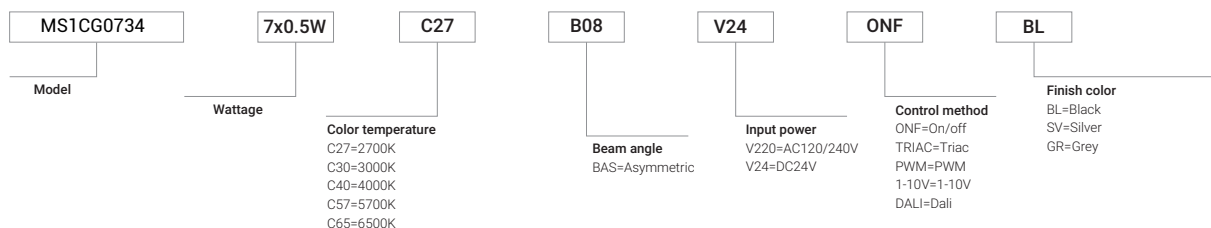

## Photometric data

