



MODEL: MI8SVT1212S-10W

Introduction

VIVID T2, the most reliable dot-free silicon flexible linear light, verical bend-able, offers seamless fittings built to preserve light uniformity. Engineered for on-site configuration and assembly makes VIVID T2 the definite solution for architectural accents and signage. VIVID T2 flexibility is just one of the many outstanding features which allow designers to explore organic shapes and advanced patterns, previously not possible.

Features

- Vertical bend-able.
- Unique optical light distribution structure design, uniform lighting surface and no shadow.
- High light transmittance, environmental protection grade silicone material, integrated extrusion molding process.
- Flexible and cuttable module to support design freedom.
- Long operational length per single power feed possible up to 25m for CC PCB type, 5m for CV PCB type.
- 24V technology for easy dimensioning.
- IP67 protection level, salt solution resistance, acids & alkalis, corrosive gases, fire and UV.
- Excellent toughness, simple and stylish appearance, delicate and unique.
- Reliable connection over long periods of time: IP66/67 connector with built-in protection against liquids penetrating through the wires into the LED strip.
- Use three kinds of entry cable to meet the different installing request.
- L70/B50 > 50,000hrs.

Applications areas

- Architectural façade lighting.
- General and cove lighting.
- Glass grazing illumination.


Mounting type

- Surface mount with clips, aluminium profile.
- Suspension mount aluminium profile and rod suspend accessories.

Approval and marking



Feature




Beam angle



Technical information

• Model	: MI8SVT1212S-10W
• Rated power	: 10W/m
• Input voltage	: DC24V
• Color temperature	: 2100K/2400K/2700K/3000K/3500K/4000K/ 5000K/6000K/TW/red/green/blue/amber/ pink/RGB, CRI>90
• Beam angle	: 120°
• Control method	: DMX512
• Protection grade	: IP67
• Ambient temperature	: -25°C~45°C
• Storage temperature	: -25°C~60°C
• Product life	: L70/B50 > 50000 hours

Dimension: (mm)

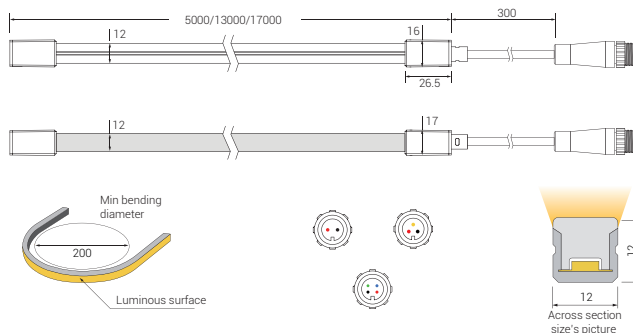


We reserve the right to make technical and design changes.

THIEN MINH MECHANICAL - ELECTRIC JSC

Head office: MESTAR Building, No. 98/11 Ung Van Kiem Street, Ward 25, Binh Thanh District, Ho Chi Minh City, Vietnam
Tel: (84) 28.3899 4790 - Email: mestar@mestar.vn - Web: www.mestar.vn

Ha Noi Office: TT4.18, Xuan Phuong Tasco Urban Area, Xuan Phuong Ward, Nam Tu Liem District, Hanoi City, Vietnam.
Tel: (84) 24.3222 2411



VIVID T2 - FLEXIBLE LINEAR LIGHT**Connection accessory**

Stainless steel mounting clips

MA-1212S-CL-S

Aluminium profile

MA-1212S-PRF

Suspension installation

MA-1212S-SPR