



Introduction

UPPER 11 is vertical illuminance luminaires applicable to the ground or floor, designed for fitting High Power LED source. Single color version or dynamic RGB color for upward lighting emitted. Power supply AC100-240V with constant current integrated driver or DC24V input voltage. Cover frame, bolts and screws made of polished stainless steel, body are made of high pressure die-casting aluminum. Mounting sleeve box for installation consist of aluminum alloy compression forming come with main product.

Features

- The body are made of high pressure die-casting aluminum.
- Cover are made of stainless steel.
- High strength toughened clear glass.
- LED module: High-power LEDs on metal-core PCB.
- High-efficiency PMMA lens with multi beam angle option.
- Adopt American CREE original LED light source, high flux output, excellent consistency of color.
- Constant current AC100-240V driver with On/Off or DC24V input voltage with DMX 512 control system.
- Single color with various temperature option: 2700K/3000K/4000K/5000K/6000K.
- Dynamic color with RGB option have gray level reach 65,536 degree equally make the light result is more beautiful.
- Powerful DMX512 interface adopt high reliable bus connect, all has the function of automatic addressing.

Installation instruction

- The product is secured to the outer sleeve by means of four TORX-type screws. The luminaire can be installed in-grounded, floor standing.

Applications areas

- Vertical illuminance for brightening the surroundings and segmenting the exterior landscape...

Mounting type

- Ground recessed, floor recessed.


Approvals and markings



Feature




Beam angle



Product color




Dimension: (mm)

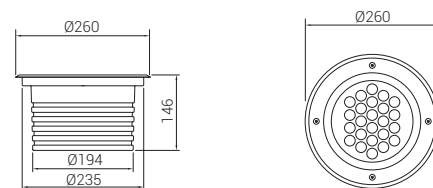


Technical information

• Model	: MS2HUP2130CB-30W
• Led brand	: CREE
• Led quantity	: 18pcs
• Rated power	: 30W
• Lumen	: 1200lm ±10%
• Input voltage	: DC24V/ 100-240V~ 50/60Hz
• Color temperature	: RGB
• Beam angle	: 8°
• Control method	: DMX512
• Protection grade	: IP67
• Ambient temperature	: ~25°C~50°C
• Ambient humidity	: 10%~90%
• Product life	: 50.000hrs

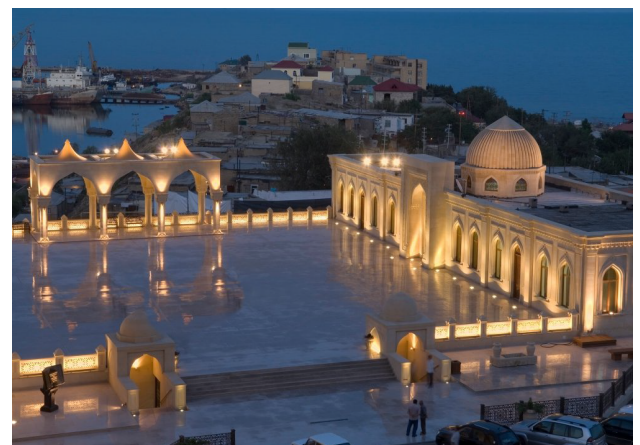


Accessories




Square-meshed grill

MA-2130-SMG



Honeycomb grill

MA-2130-HGR



Anti-slip glass

MA-2130-AGL

MS2HUP2130CB-30W

Connection Accessories



Connector 3 pin - IP68

MA-M684-03



T Connector 3 pin - IP68

MA-M685T-03



Y Connector - IP68

MA-M685Y-03



Junction box 3 holes - IP68

MA-M686-03

