TRIAC PWM 1-10V DALI IP65 OUTDOOR RATED RoHS COMPLIANT CE

Unit: mm

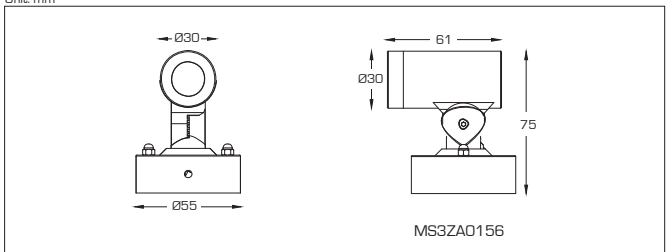

MS3ZA0156

Adjustable beam direction

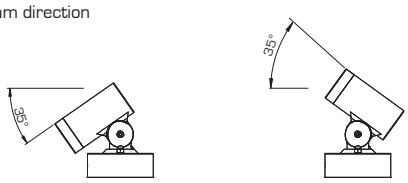

MS3ZA0156

MS3ZA0156

Specifications

Housing	12# Die-casting dark grey powder coated aluminum. T=60~80μm. Adhesion of ISO class 1/ASTM class 4B
PC cover	UV-Resistance PC.T=3.5mm
Lens	Optical lens, efficiency ≥85%
Cable gland	IP-68 PG-9 PVC
LED	OSRAM or NICHIA
PCB	Excellent heat conductivity aluminum, coefficient of heat Conductivity≥2.0w/mk
LED Driver	Constant voltaget input. Constant current output
Operating temperature	-20°C~40°C
Power Cable	AWM 1A 105°C 600V 18AWG FT1 L=300mm
Mounting base	Powder coated die-casting aluminum
Dimmable Support	**Triac PWM T-10 Dali**

LED Colour Temperature

- 2700K
- 3000K
- 4000K
- 5700K
- 6500K

Optics

B17
LO115D020ME 15°
LO120D020ME 20°
LO130D020ME 30°
LO150D020ME 50°

Housing color option

Sanded Brown RAL8019	Sanded Black RAL9005	Silver Resistand Paint RAL9006

Preferred selection

Item No.	Light source	Lens	Lens degree selected by manufacturer (Ø 1/2)	Input voltage (V)	Typical operating current (mA)	Typical consumption (W)	Typical luminance (lm)	IK rate
MS3ZA0156	1x1W	B17	30°	24V DC	48	1.2	Cool white=100 Warm White=83	02

We reserve the right to make technical and design changes. - Update: 02-11-2021