



Introduction

GRAZE 9 is a surface mounted, exterior-rated LED linear luminaire that is designed for façade and outdoor architectural lighting applications. One family that fits all wall washing, grazing and also linear flood lighting. The robust and smart mechanical profile and unique optical designs make it ideal for illuminating building façade, bridges, overpasses and any application that requires a linear lighting solution. Available in RGBW and DMX control option available to give architects and designers the freedom to explore a wide range of concepts and design with no limitations.

Features

- #6063 aluminum alloy housing.
- High strength toughened glass lampshade.
- Surface finish with anodizing treatment, resist the impact and friction, self-clean rainwater ability.
- LED module: high-power LEDs on metal-core PCB.
- High-efficiency PMMA lens with various beam angle option.
- Adopt American CREE original LED light source or LUMILEDS/OSRAM light source for high flux output, excellent consistency of color.
- Constant voltage + Constant current LED driver supply unit.
- Constant current AC100-305V driver, DC24V input voltage option for DMX512 control method.
- Dynamic color with RGBW option has gray level reach 65,536 degree equally make the dynamic light-dimmer more soft and the color richer.
- Powerful DMX512 interface adopt high reliable bus connect, all has the function of automatic addressing.
- Two cable entries for through wiring or single cable entry option.

Applications areas

- Wall, ceiling and balustrade installation for outdoor projects.

Mounting type

- Surface mounting with adjustable brackets.


Approvals and markings



Feature




Beam angle



Product color



Dimension: (mm)

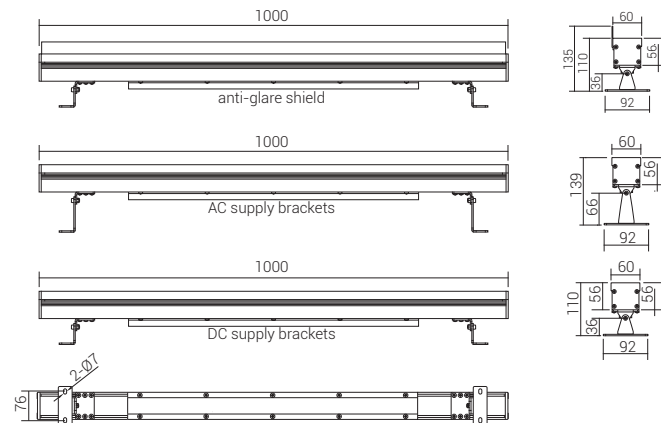

Technical information

• Model	: MS6HGR1307F-L10-60W
• Led brand	: OSRAM RGBW 4 IN 1
• Led quantity	: 20pcs
• Rated power	: 60W
• Lumen	: 2400lm ±10%
• Input voltage	: DC24V/ 100-305V~ 50/60Hz
• Color temperature	: RGBW
• Beam angle	: 8°
• Control method	: DMX512
• Protection grade	: IP66
• Ambient temperature	: -25°C~50°C
• Ambient humidity	: 10%~90%
• Product life	: 50.000hrs



We reserve the right to make technical and design changes.

THIEN MINH MECHANICAL - ELECTRIC JSC

Head office: MESTAR Building, No. 98/11 Ung Van Khiem Street, Ward 25,

Binh Thanh District, Ho Chi Minh City, Vietnam

Tel: (84) 28.3899 4790 - Email: mestar@mestar.vn - Web: www.mestar.vn

Ha Noi Office: TT4.18, Xuan Phuong Tasco Urban Area, Xuan Phuong Ward,


Nam Tu Liem District, Hanoi City, Vietnam.

Tel: (84) 24.3222 2411




GRAZE 9_LINEAR LUMINAIRES


Accessories



anti-glare shield
MA-1307-AGV



Honeycomb grill
MA-1307-HGR



Connection Accessories



Connector 3 pin - IP68
MA-M684-03



T Connector 3 pin - IP68
MA-M685T-03



Y Connector - IP68
MA-M685Y-03



Junction box 3 holes - IP68
MA-M686-03

We reserve the right to make technical and design changes.

