



## WALL MOUNTING LANDSCAPE LIGHT



# WALL MOUNTING LANDSCAPE LIGHT



## Introduction

Wall mounting landscape light is the recessed mounting luminaire for indoor/outdoor use. The manufacture process is extremely strict, high quality output with CE, ROHS certified. Its excellent light brings comfort and good experience to the users.

## Feature

- Housing and front cover 12# aluminum with anti-corrosion powder coated, T=60-80µm. Adhesion of ISO class 1/ASTM class 4B.
- Light window UVstop & fireproof PC T=6mm.
- Gasket tooling shaped seal.
- LED driver main voltage AC100V-240V driver inside builded.
- Power cable outside of luminaires H05RN-F 2×1.0mm<sup>2</sup> L=0.3m (DC24V), H05RN-F 3×1.0mm<sup>2</sup> L=0.3m (AC120/240V).
- Warranty 3 years.

## Application area

- Applied to facade of building, hotel, resort, etc.

## Mounting type

- Surface mounting.


## Approval and marking



## Feature



## Beam angle



## Color temperature


### Single

2700K 3000K 4000K 5700K 6500K

## Product color




## Dimension (mm):

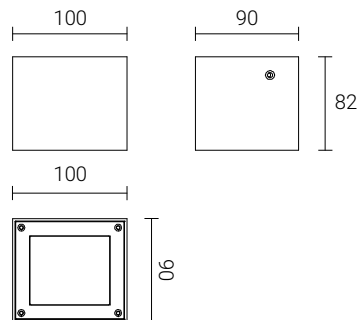


# WALL MOUNTING LANDSCAPE LIGHT

## Variant

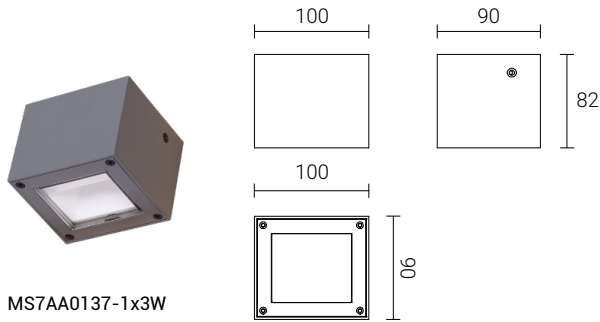

MS7AA0137-1x3W

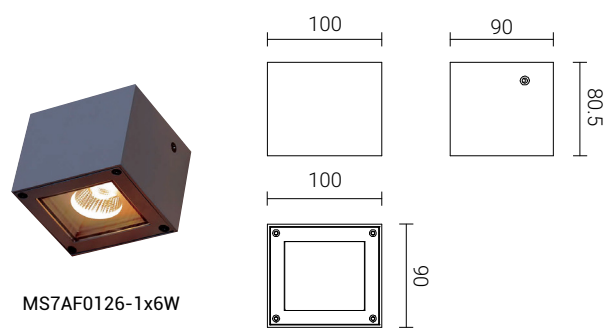


MS7AF0126-1x6W

## Specification

Model	MS7AA0137-1x3W	MS7AF0126-1x6W
Led brand	LED COB NICHIA	LED COB NICHIA
Rated power	1x3W	1x6W
Luminous flux	155lm	745lm (cool white), 651lm (warm white)
Luminous efficacy	51.7lm/W	124.2lm/W (cool white), 108.5lm/W (cool white)
Input voltage	DC24V/AC120/240V 50/60Hz	DC24V/AC120/240V 50/60Hz
Color temperature	2700K/3000K/4000K/5700K/6500K	2700K/3000K/4000K/5700K/6500K
Beam angle	120°	25°
Control method	On/off, Triac, PWM, 1-10V, Dali	On/off, Triac, PWM, 1-10V, Dali
Protection grade	IP65	IP65
IK rating	IK06	IK06
Operating temperature	-20°C~40°C	-20°C~40°C
Product life	35000 hours	35000 hours

## Typical order example

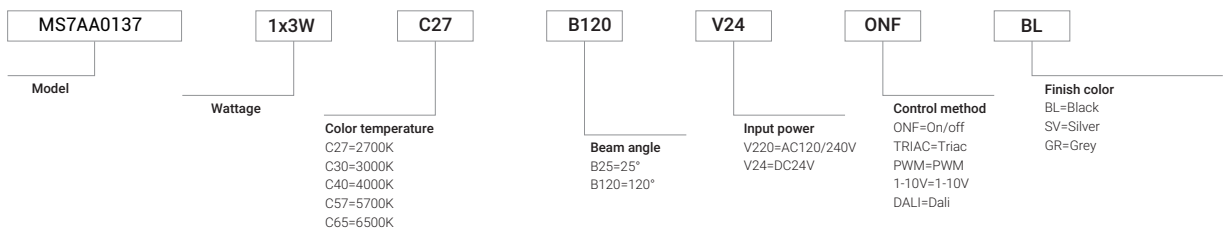

## Photometric data

