



MODEL: MI8SVSS41220-10W

Introduction

Flex S4 is luminaire for indoor/outdoor use. The manufacture process is extremely strict, high quality output with CE, ROHS, UL certified. Its excellent light brings comfort and good experience to the users.

Features

- Seamless and uniform light output, dot free.
- Bendable at horizontal direction. IP67 protection.
- Robust housing with high quality silicon, UV proof for true outdoor application.
- Built-in IC/SM18522PS, DMX512 signal protocol, single color gradient color change, chasing, anima on and scene display.
- Varying color programs can be controlled by 10 pixels per meter, input voltage DC24V.
- Equipped with LED chip SMD5050 that is both bright and energy-efficient.
- Easy installation, mini bending diameter 80mm.

Applications areas

- Applied to facade of building, hotel, villa, etc.

Mounting type

- Surface mounting.

Approval and marking



Color temperature



Control method



Product color



Beam angle




Technical information



• Model	: MI8SVSS51220-10W
• Led chip	: LED SMD5050
• LED quantity	: 70 LEDs/m
• Rated power	: 10W/m
• Luminous flux	: 20-91lm
• Luminous efficiency	: 2-9.1lm/W
• Input voltage	: DC24V
• Color temperature	: RGBW
• Beam angle	: 120°
• Control method	: DMX
• Protection grade	: IP67
• Operating temperature	: -25°C~60°C
• Product life	: 50000 hours

Dimension: (mm)

Front view




Side View




DMX RGBW


*Optional waterproof head, this picture is for reference only.



* Ordinary end Cap

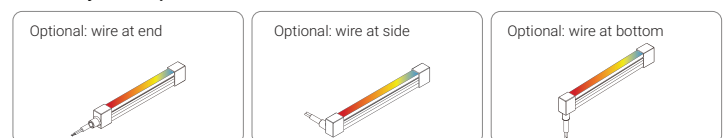

* Injection-moulded endcap

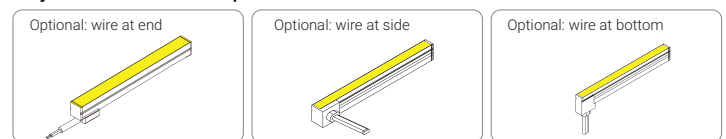

We reserve the right to make technical and design changes.


THIEN MINH MECHANICAL - ELECTRIC JSC

Head office: MESTAR Building, No. 98/11 Ung Van Kiem Street, Ward 25, Binh Thanh District, Ho Chi Minh City, Vietnam


Tel: (84) 28.3899 4790 - Email: mestar@mestar.vn - Web: www.mestar.vn



Accessory



Mounting clips (aluminum)

MAVSS41220-CL

Aluminium profile

MAVSS41220-AP

End cap

MAVSS41220-EC1

Front outlet end cap

MAVSS41220-EC2

Side outlet end cap

MAVSS41220-EC3

Screws

MAVSS41220-SC

Glue

MAVSS41220-GL