

WOOD 2 - LINEAR LUMINAIRE



MODEL: MS6SW00657-6x1.8W

Introduction

Wood 2 is the surface luminaire for indoor/outdoor use. The manufacture process is extremely strict, high quality output with CE, ROHS certified. Its excellent light brings comfort and good experience to the users.

Feature

- Housing extruded aluminum anodized finishing.
- Housing with high anti-corrosion paint in the near-sea environment (optional).
- Bracket aluminum anodized finishing.
- Light window tempered glass, T=2mm.
- Gasket glass and housing are silicone sealed.
- Optics lens, efficiency $\geq 85\%$.
- Power cable outside of luminaire H05RN-F 3X1.0mm² L=0.5m (120V/240V), H05RN-F 2x1.0mm² L=0.25m (DC24V).
- Corlor temperature: 2700K/3000K/4000K/5700K/6500K, Ra>80.
- Use LED brand OSRAM.
- Warranty 3 years.

Application area

- Applied to facade of building, hotel, villa, etc.

Mounting type

- Surface mounting.

Approval and marking




Product color



Feature



Beam angle



Technical information

• Model	: MS6SW00657-6x1.8W	
• Led brand	: LED SMD OSRAM	
• Rated power	: 6x1.8W	
• Luminous flux	DC24V	: 800lm (cool white), 724lm (warm white)
	AC120/240V	: 760lm (cool white), 700lm (warm white)
• Luminous efficacy	DC24V	: 74lm/W (cool white), 67lm/W (warm white)
	AC120/240V	: 73lm/W (cool white), 64lm/W (warm white)
• Input voltage	: DC24V/AC120/240V 50/60Hz	
• Color temperature	: 2700K/3000K/4000K/5700K/6500K, Ra>80	
• Beam angle	: 15°/20°/30°/45°	
• Control method	: On/off, Triac, PWM, 1-10V, DALI	
• Protection grade	: IP65	
• IK rating	: IK05	
• Operating temperature	: -20°C~40°C	
• Product life	: 50000 hours	


We reserve the right to make technical and design changes.

THIEN MINH MECHANICAL - ELECTRIC JSC

Head office: MESTAR Building, No. 98/11 Ung Van Khiem Street, Ward 25, Binh Thanh District, Ho Chi Minh City, Vietnam


Tel: (84) 28.3899 4790 - Email: mestar@mestar.vn - Web: www.mestar.vn

Dimension: (mm)




Photometric data

MS6SW00657-20°

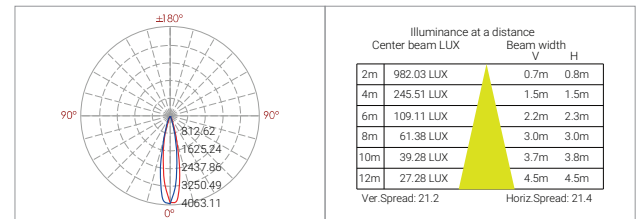

WOOD 2 - LINEAR LUMINAIRE


Accessory

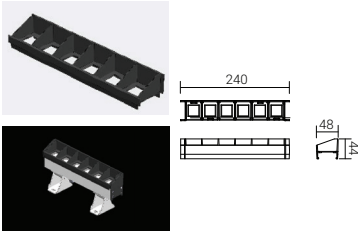

Anti-glare louver

MA6001-AG






Waterproof solution

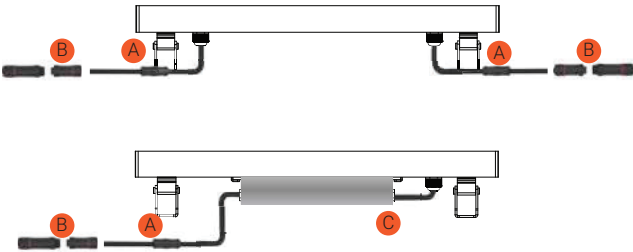

- A** Water-stopper (Included)
A IP-65 water-stopper is added in the end of luminaires as standard assembly which is also an important system for water resistance.
- B** Connector IP67 (option)
A IP-67 connector is as an optional assembly and ensures that water vapor will not enter into luminaires directly.
- C** High voltage driver IP65

Connection

Low voltage

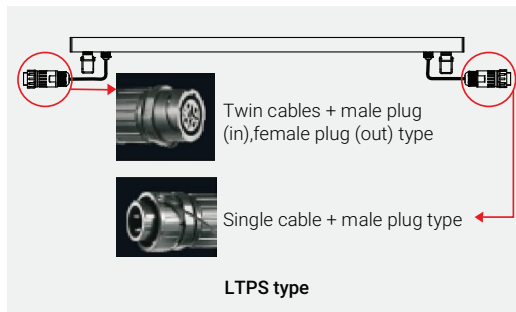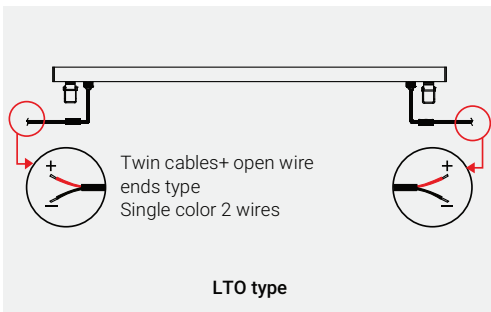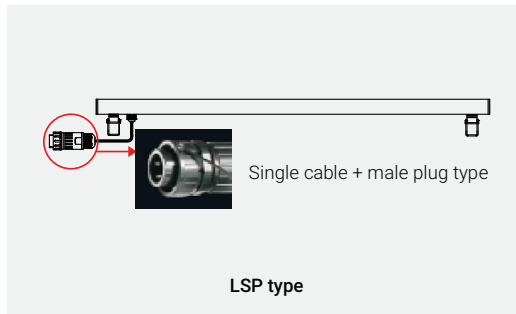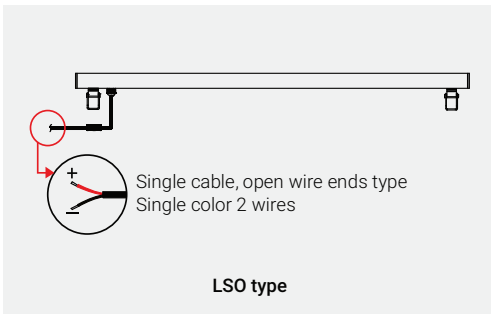

Low voltage input default: twin LTO type power cable, waterproof plugs are not included, other power cable type and plugs are optional.

We reserve the right to make technical and design changes.

THIEN MINH MECHANICAL - ELECTRIC JSC

Head office: MESTAR Building, No. 98/11 Ung Van Khiem Street, Ward 25, Binh Thanh District, Ho Chi Minh City, Vietnam



Tel: (84) 28.3899 4790 - Email: mestar@mestar.vn - Web: www.mestar.vn



WOOD 2 - LINEAR LUMINAIRE

Connection

High voltage

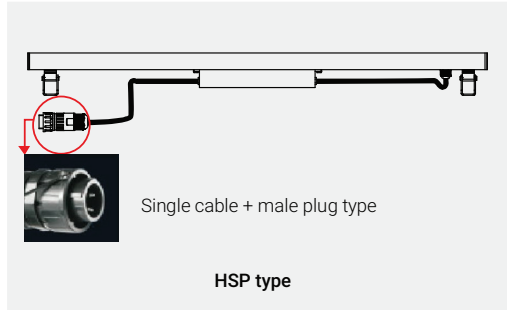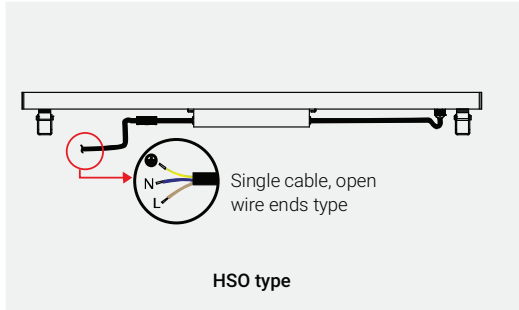

High voltage input default: single HSO type power cable, waterproof plugs are not included, other power cable type and plugs are optional.

